


1x8 Clear Kebony Cladding Board / #2683

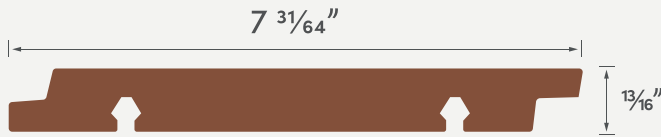

Actual Dimensions: $1\frac{3}{16}" \times 7\frac{31}{64}"$
Lengths: 10', 12', 14', 16'

Moisture Content* 4-8%

Cupping* Max. 1% of width

Density
(12% mc) 41.8 lb/ft³
670 kg/m³

Crook* 10' 12': Max. 10mm ($2\frac{5}{64}"$)
14' 16': Max. 13mm ($3\frac{3}{64}"$)

Cracks Surface cracks and checks may be visible

Wane May occur on the back

Fire Rating

Class B as per ASTM Designation E84-15a, "Standard Method of Test for Surface Burning Characteristics of Building Materials".

Hardness (Janka) 1618 lb
7.2 kN

Knots/Pitch pockets

May be visible and are a natural occurrence in wood

Dimensional Stability (Swelling/Shrinkage)

Maximum Swelling (dry to wet, tangential direction): 4%

*upon delivery

NOTE: There may be defects on the back side. These will not affect the technical quality of the product. This board is not reversible.

CERTIFICATIONS

FSC® SCS-COC-008513 - www.fsc.org

EPD: NEPD-407-287-EN - www.epd-norge.no

ICC ESR-3756 - www.icc-es.org



EXAMPLE OF WEATHERING



DISCLAIMER

Kebony products will change in appearance when exposed to rain and sun. Color changes and surface cracks will occur due to natural weathering. Kebony cannot be held liable for any such variations in colour and surface appearance. This will not influence durability and overall performance of the product.

Kebony is continuously working on product development. Information in this datasheet may be changed without further notice.

Up to 5% of the delivered boards may be outside this specification and must be accepted.